

FRAGILITY VULNERABILITY ASSESSMENT

Date:	9/17/2018
Building Type:	RC4/MR/LD
Author:	UNIANDES
Sheet:	1 de 3

REINFORCED CONCRETE BUILDINGS

GENERAL INFORMATION

Index Building Taxonomy Code:

1. Main structural system:.....
2. Height range:.....
3. Seismic design level:.....
4. Diaphragm Type:.....
5. Structural Irregularity:.....
6. Span Length:.....
7. Pier Type:.....
8. Foundation Type and Flexibility:.....
9. Seismic Pounding Risk:.....
10. Seismic Retrofitting:.....
11. Structural Health Conditions:.....
12. Vulnerable Non-Structural Components:.....

RC4/MR/LD/RD/NI/SS/SW/RF/NP/OS/GC/VN

RC1 ☐	RC2 ☐	RC3 ☐	RC4 ☒	RC5 ☐
	Low (LR) ☐		Medium (MR) ☒	High (HR) ☐
Poor (PD) ☐	Low (LD) ☒		Medium (MD) ☐	High (HD) ☐
	Flexible diaphragm (FD) ☐		Rigid diaphragm (RD) ☒	
No irreg. (NI) ☒	Hor. (HI) ☐	Vert. (VI) ☐		Hor. and vert. (HV) ☐
	Short span (SS) ☒	Slender - weak column (SW) ☐		
	Regular column (RO) ☒	Regular column (RO) ☐		
	Rigid foundation (RF) ☒	Flexible foundation (FF) ☐		
	No pounding (NP) ☒	Pounding risk (PR) ☐		
	Original structure (OS) ☒	Retrofitted structure (RS) ☐		
	Good condition (GC) ☒	Poor condition (PC) ☐		
	Non vulnerable (NN) ☐	Vulnerable (VN) ☒		

INTRINSIC CHARACTERISTICS

General Geometry:

Building plane area (m ²):.....	299.25
Building total area (m ²):.....	598.5
Number of stories:.....	2
Story height (m):.....	3
Number of spans in X direction:.....	7
Typical span length in X direction (m):.....	4.5
Number of spans in Y direction (m):.....	3
Typical span length in Y direction (m):.....	3.5
Foundation system:.....	CISF
Typical column dimensions (cm x cm):.....	25X25
Typical beam dimensions (cm x cm):.....	20X30
Typical shear wall dimensions (cm x cm):.....	-
Typical bracing member section (cm x cm):.....	-

Material properties:

Concrete:..... f _c (MPa):	21	E _c (GPa):	21.5
Reinforcement:..... f _y (Mpa):	420	E _s (GPa):	200
Structural steel:..... f _y (Mpa):	-	E _s (GPa):	-
Masonry:..... f _m (MPa):	-	γ:.....	-

Infill walls:


Infill type:.....	Interior walls		Facade walls	
Wall height (m):..... X ☐ - Y ☐	3	X ☐ 1.5 Y ☐	3	
Depth (m):..... X ☐ - Y ☐	0.15	X ☐ 0.15 Y ☐	0.15	
Isolated from structure:.....	Yes ☒ No ☐	Yes ☒ No ☐		

SEISMIC BEHAVIOR

Total weight (D) (kN):.....	3803
Total weight (L) (kN):.....	124
T ₁ uncracked (sec):.....	0.21
T ₁ cracked (sec):.....	0.32

MODELLING PARAMETERS

3D Numerical model:

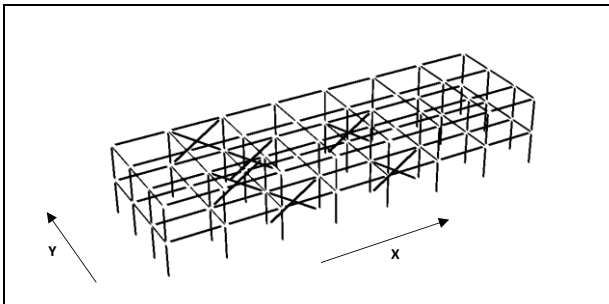

Modelling considerations:

Plasticity model:.....	Lumped ☒	Distributed ☐
Infill walls modelling approach:.....	-	
Roof Diaphragm:.....	Rigid ☒	Flexible ☐
Foundation:.....	Rigid ☒	Flexible ☐
	k _v (kN) _____	k _h (kN) _____ k _θ (kN) _____

Loads:

Over imposed design dead load (D) (kN/m ²):.....	1.2
Design Live load (L) (kN/m ²):.....	2.0
Load combination in non-linear analysis:.....	D+0.25L
Average load per square meter (kN/m ²):.....	6.6

Analysis considerations:

Global P-Delta effects:.....	Yes ☒	No ☐
Rigid zones:.....	Yes ☒	No ☐
Initial effective stiffness:.....	Beams ☐ 0.35	Columns ☐ 0.30
Analysis direction:.....	X ☒	Y ☐
Analysis orientation:.....	(+) ☒	(-) ☐

1st mode mass participation (%):.....	83.6
First floor column area (m ²):.....	2.88
Total weight (D+L) /columns area (%f _c):.....	0.15
Horizontal first story shear column capacity (g):.....	0.45


FRAGILITY VULNERABILITY ASSESSMENT

Date:	9/17/2018
Building Type:	RC4/MR/LD
Author:	UNIANDES
Sheet:	2 de 3

REINFORCED CONCRETE BUILDINGS

SEISMIC BEHAVIOR


Capacity Curve:

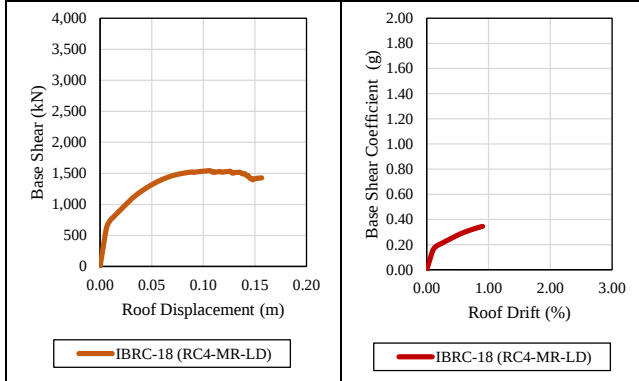

Idealized capacity curve:

Behavior point	Base shear (kN)	Displacement (m)
Yield point:.....	750	0.09
Maximum capacity:.....	1490	0.10
Ultimate capacity:.....	1420	0.16

Collapse mechanism: Steel frame failure

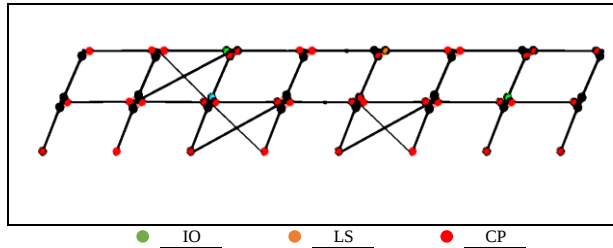

NON-LINEAR ANALYSIS PARAMETERS


Seismic ground motions:

Number of ground motions used:.....	22
Soil type:.....	C
Source type:.....	Far field
Retrieved from:.....	PEER-NGA


Analysis considerations:

Non-linear analysis:.....	Static ☒ Dynamic ☐
Analysis methodology:.....	N2
Intensity measure parameter (IM):.....	Sa[T] (g)
Scaling factor:.....	0.1 Minimum: 0.1 Maximum: 2

Ground motion spectra:

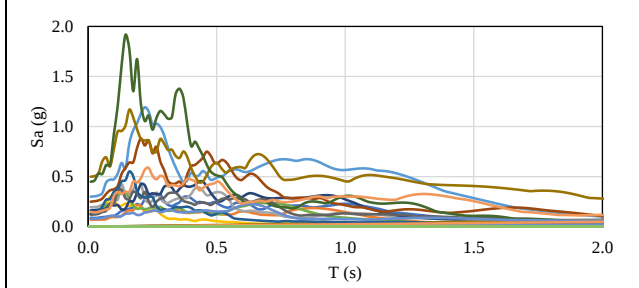

Illustrative EDP:

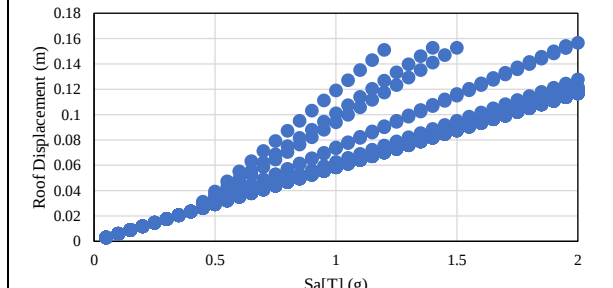


FRAGILITY ASSESSMENT

Damage states (DS):

Intensity Measure:.....	Sa[T] (g)
Slight (SD) - Operational (OP) (%):.....	0.50
Medium (MD) - Immediate occupancy (IO) (%):.....	0.80
Extensive (ED) - Life safety (LS) (%):.....	1.30
Collapse (CD) - Collapse prevention (CP) (%):.....	2.20
Integration methodology:.....	LSM

	OP	IO	LS	CP:
Mean:.....	0.54	0.78	1.22	3.21
Deviation:.....	0.21	0.27	0.31	0.68

Fragility function:

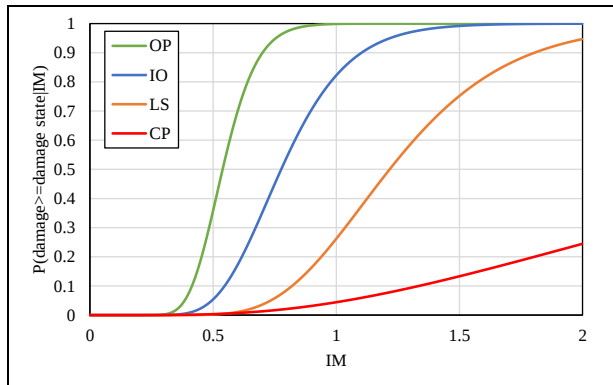

FRAGILITY VULNERABILITY ASSESSMENT

Date:	9/17/2018
Building Type:	RC4/MR/LD
Author:	UNIANDES
Sheet:	3 de 3

REINFORCED CONCRETE BUILDINGS

VULNERABILITY ASSESSMENT

Component model:

Story	Group	Subgroup	Description	Unit	Quantity	Fragility curve	EDP	Correlation
1	E	C1	Column-one beam	Node	8	B1041.091a	Drift	0
1	E	C2	Column-two beams	Node	21	B1041.091b	Drift	0
1	A	F2	Masonry facade	5m x 3m	14	C1011.006a	Drift	1
1	A	M4	Masonry wall	5m x 3m	6	C1011.006b	Drift	1
1	C	S2	Contents	5m x 5m	13	E2022.010a	Drift	0
2	E	C1	Column-one beam	Node	8	B1041.091a	Drift	0
2	E	C2	Column-two beams	Node	21	B1041.091b	Drift	0
2	A	F2	Masonry facade	5m x 3m	14	C1011.006a	Drift	1
2	A	M4	Masonry wall	5m x 3m	6	C1011.006b	Drift	1
2	C	S2	Contents	5m x 5m	13	E2022.010a	Drift	0


Phase I:

Beta model uncertainty:.....	0.3
Number of iteration for model uncertainty:.....	20
Number of iterations for damage states uncertainty:.....	20
Number of iterations for cost and time uncertainty:.....	20
Scale factor for cost:.....	Yes ☐ No ☒

Phase II:

Lower intensity to no damage (g/g):.....	0.1
Maximum allowable residual drift for demolition (%):.....	1.5
Percentage of building replacement value (%):.....	100
Bidirectional factor for total cost model:.....	1
Intensity level for building evacuation (g/g):.....	2

Vulnerability function:

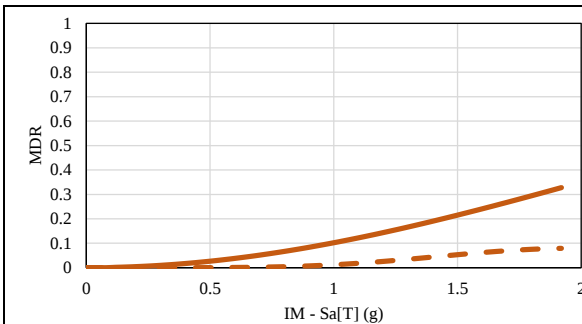

Fragility to vulnerability weighting percentage:

OP (%):	5	IO (%):	15	LS (%):	65	CP (%):	100
---------	---	---------	----	---------	----	---------	-----

GLOSSARY

f _c :	Compressive concrete strength	k _v :	Spring vertical stiffness	IM:	Intensity measure
E _c :	Concrete elastic module	k _h :	Spring horizontal stiffness	DM:	Damage states
f _y :	Tensile steel strength	k ₀ :	Spring rotational stiffness	OP:	Operational
E _s :	Steel elastic module	D:	Death load	IO:	Immediate occupancy
f _m :	Masonry compressive strength	L:	Live load	LS:	Life safety
γ:	Masonry density	T ₁ :	First mode period	CP:	Collapse prevention
CISF:	Concrete isolated spread footing	S _a :	Pseudo acceleration	EDP:	Engineering demand parameters

Horizontal first story shear column capacity (g) = $(\sqrt{f_c}/6) \cdot (A_{col}/W)$

PRINCIPAL REFERENCES

Reference project:.....	Global Library of School Infrastructure - GLoSI
Main bibliographical references:.....	GLoSI Technical Report
	FEMA P-695
	ASCE 41-17
	N2 Method (Fajfar, 2000)
	GEM Analytical Vulnerability Assessment Guideline (D'Ayala et al, 2015)
	FUNVUL (www.ecapra.org)